



# BULKHEAD

Victory Bear chamfers produce the cleanest and sharpest finishes in the industry.

Our Bulkhead double chamfer has been designed for use with 3/4" form board or standard plywood, for a 40% to 60% lumber savings over a traditional 2x. PVC provides a superior finish to wood forms, saving you time and labor costs after the walls are tilted up.


## FEATURES & BENEFITS

### Flex-Edge Seal

Victory Bear Flex-Edge technology seals tightly against the casting surface, preventing concrete seepage while creating sharp, crisp lines.

### Labor Savings

PVC provides a superior finish to wood. It releases cleanly from the concrete, and leaves no residue. The end result is a superior finish that leaves little to no finish work after the panels are lifted.

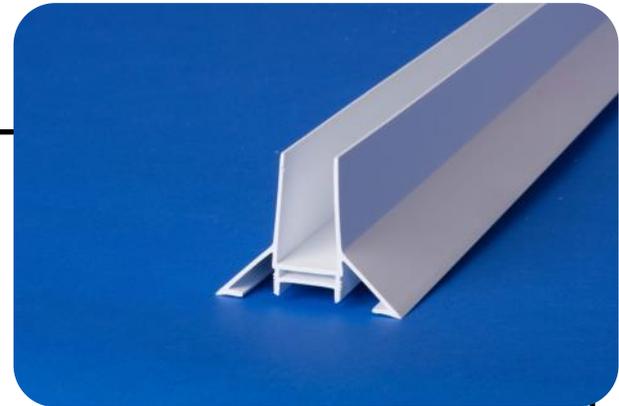

### Hidden Fastening System

With Victory Bear Bulkhead, there are no finish blemishes from screw heads or excess glue. All screws and glue remnants are hidden under the surface for a smooth finish and clean, sharp lines.

# BULKHEAD



## INSTALLATION


**Step 1** - Fasten the Base Clip to the casting surface with fasteners, tape, or adhesive.



**Step 2** - Press one end of the Bulkhead's interlocking teeth into the end of the Base Clip.



**Step 3** - Continue pressing the entire length of the Bulkhead into the Base Clip.

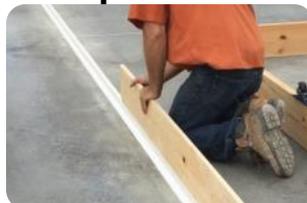


**Step 4** - Check to ensure that the interlocking teeth are fully engaged, and the chamfer seal is pressed firmly against the casting surface.



**Step 5** - Using a 1" board, apply downward pressure in the channel of the Bulkhead, working from one end to the other until it is seated in the channel. This creates a tight friction fit with the board, preventing it from rising during the pour. No nailing is necessary.



**Step 6** - Use an H style roofing clip between each section of lumber to align.

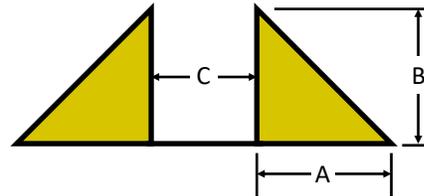

Part Number	Part Name	Width "A"	Height "B"	Width "C"	Chamfer Angle	Pieces Per Box	Ft. Per Box	Soft PVC Seal?
767	Bulkhead Double Chamfer 1 x 3/4*	0.75"	0.75"	0.75"	45°	12	96	NO
876	Base Clip	N/A	N/A	N/A	N/A	60	480	N/A

\*Base Clip Required

